


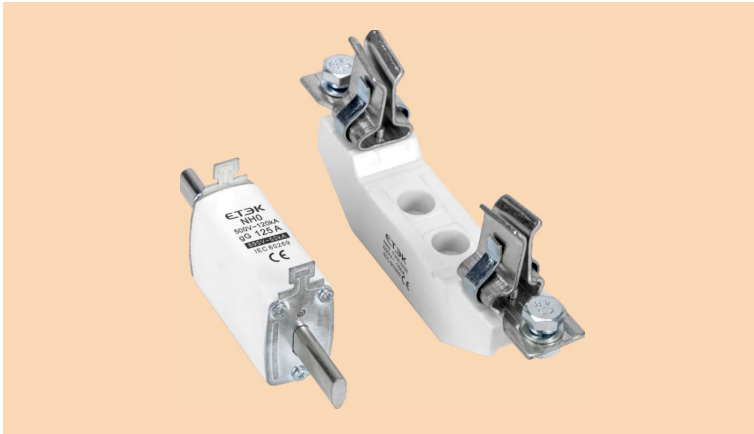

General

Rated voltage: 500VAC, 690VAC

Rated current: 20A~160A

Breaking capacity: 120kA(500VAC), 50kA(690VAC)

Rated frequency: 50Hz

Utilization category: gG/gL

Pollution level: Level 3

Installation category: Class III

Main Technical Data

Model	Equivalent models	Rated current (A)	Rated voltage (V)	I ² t (A ² Sec)		Power loss (W) 1.0In
				Pre-arcing	Total at 500V	
NH0-20A	RT16-0 NT0 RT20-0 RO31B 3NA3	20	500 690	490	2500	3.5
NH0-25A		25		1200	5600	3.2
NH0-32A		32		1800	9000	4.8
NH0-35A		35		2400	11800	4.7
NH0-40A		40		3300	16500	5
NH0-50A		50		5600	27800	6.3
NH0-63A		63		6600	26100	5.6
NH0-80A		80		9800	38900	7.1
NH0-100A		100		20600	82300	7.5
NH0-125A		125		25000	125000	11.8
NH0-160A		160		62000	310000	12.3

Dimension (mm)

