


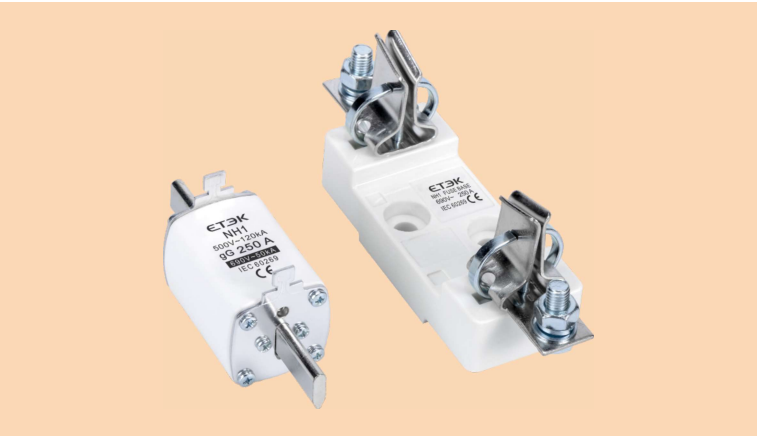

General

Rated voltage: 500VAC, 690VAC
Rated current: 50A~250A
Breaking capacity: 120kA(500VAC), 50kA(690VAC)
Rated frequency: 50Hz
Utilization category: gG/gL
Pollution level: Level 3
Installation category: Class III

Main Technical Data

Model	Equivalent models	Rated current (A)	Rated voltage (V)	I²t (A² Sec)		Power loss (W) 1.0In
				Pre-arcing	Total at 500V	
NH1-50A	RT16-1 NT1 RT20-1 RO32 3NA3	50	500 690	6350	18000	6.4
NH1-63A		63		6800	23000	5.6
NH1-80A		80		10500	31200	7.7
NH1-100A		100		22000	68200	8.2
NH1-125A		125		29000	82000	13
NH1-160A		160		62000	310000	12.3
NH1-200A		200		97000	368600	15
NH1-224A		224		124000	471200	18
NH1-250A		250		151300	574900	19

Dimension (mm)

